




Kodak EasyShare LS743 Microphone Replacement

Replace microphone

Written By: Odessa

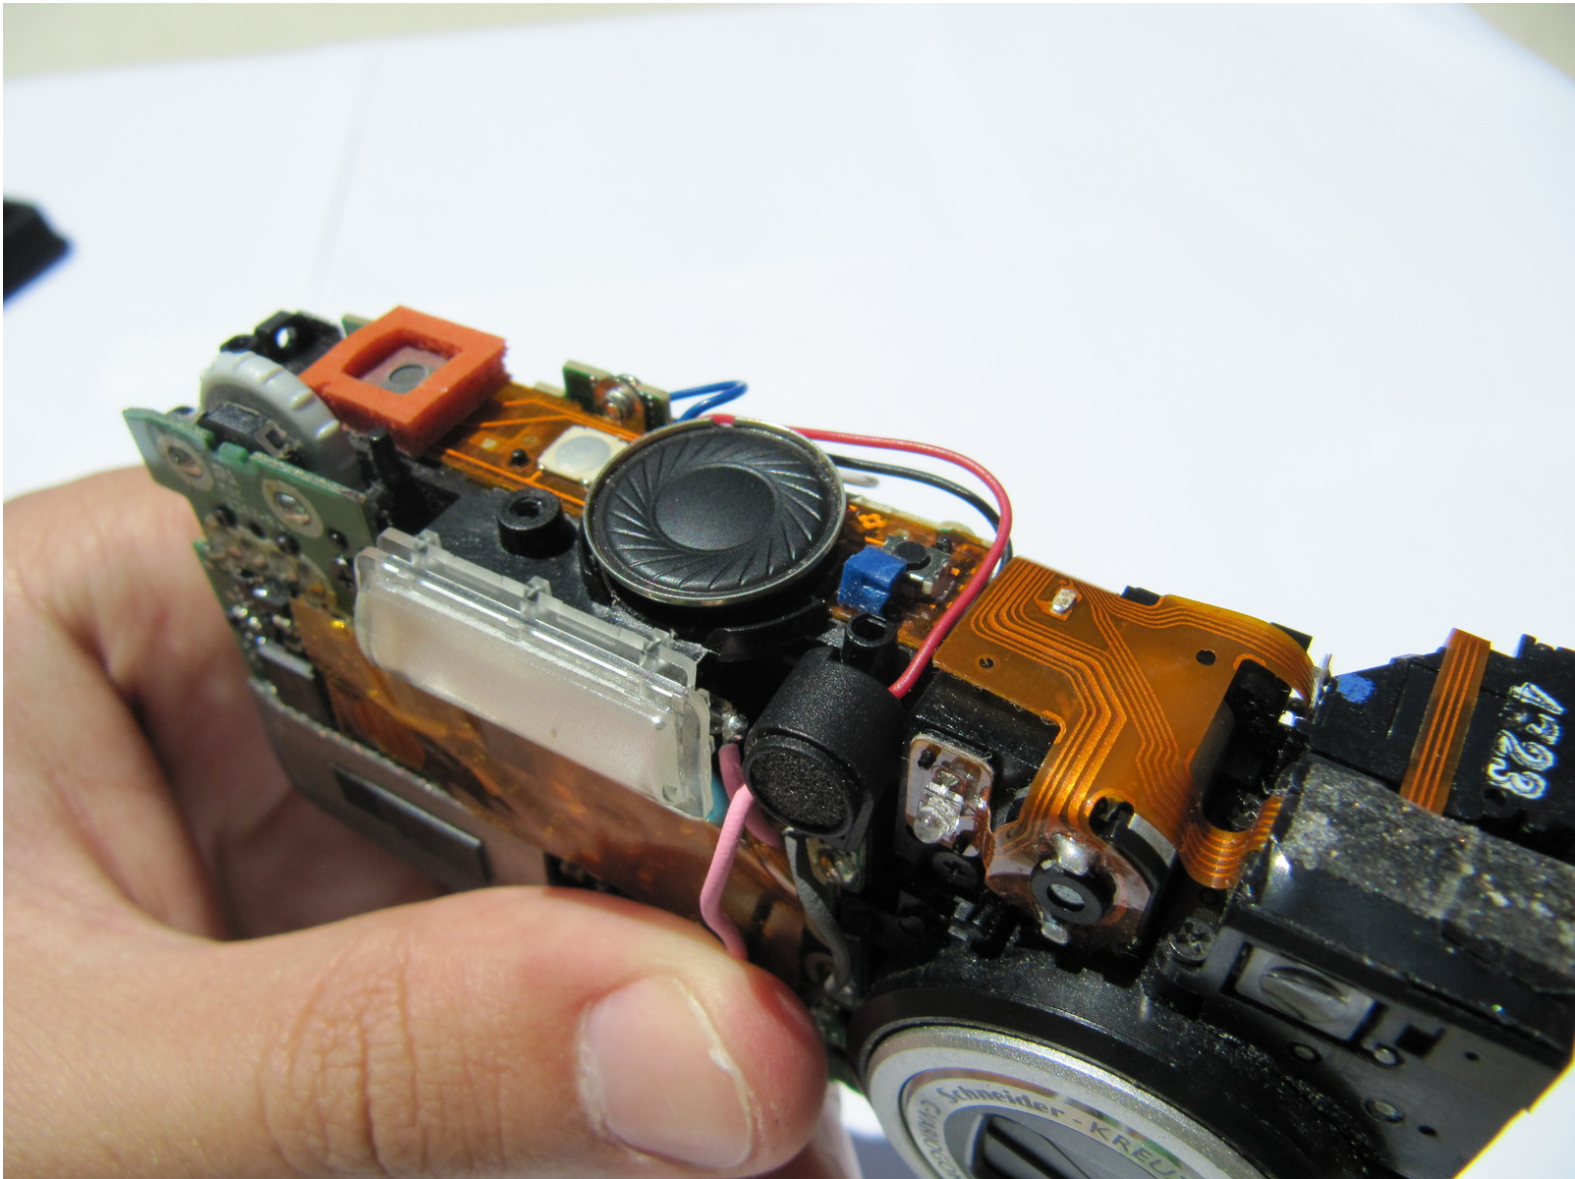

INTRODUCTION

This will show a step-by-step process in replacing the camera's mic.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Battery



- Open the battery cover.

Step 2

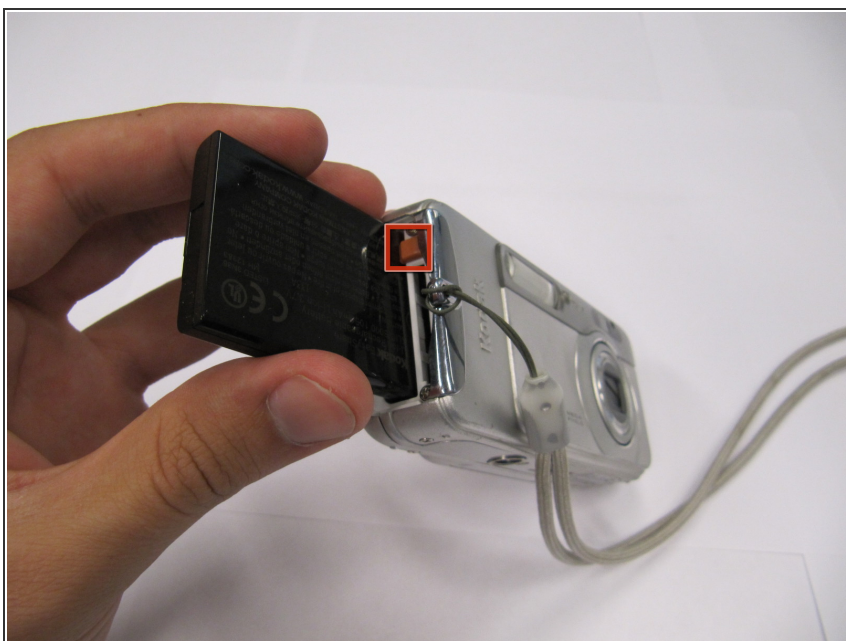

- Slide the orange latch sideways to eject the battery.
- Remove the battery.


Step 3 — Kodak EasyShare LS743 Camera Case Disassembly



- Remove 7 screws.


- 1 (6.25 mm) screw located on the top right corner, next to the view screen.
- 4 (4.45mm) screws on the bottom of the camera.
- 2 (2.95mm) screws on the left side of the camera.

Step 4

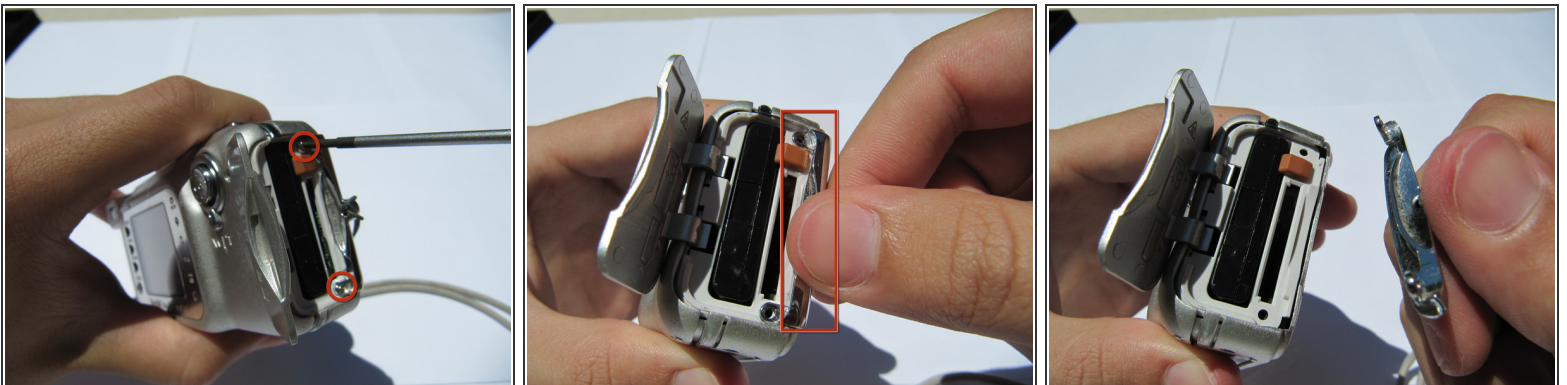


- There will be 2 (5.39mm) screws. Remove the screws in order to remove the lanyard.

Step 5

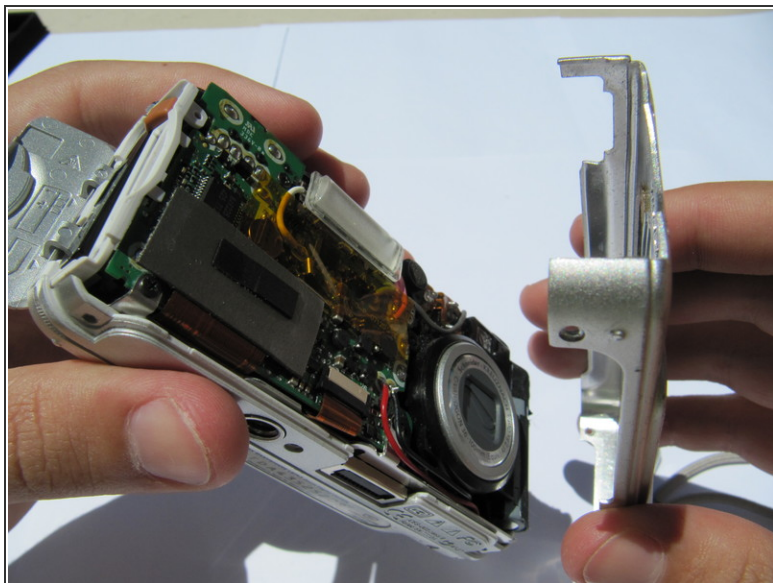


- Remove the rear camera casing.
- Remove the front casing.

Step 6 — Top and menu buttons

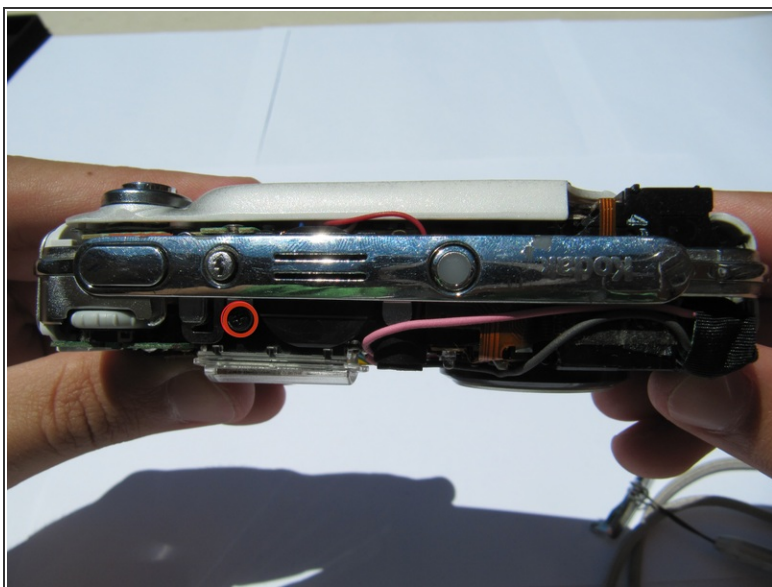

- Remove the top panel screw (1x 4.37mm).

Step 7

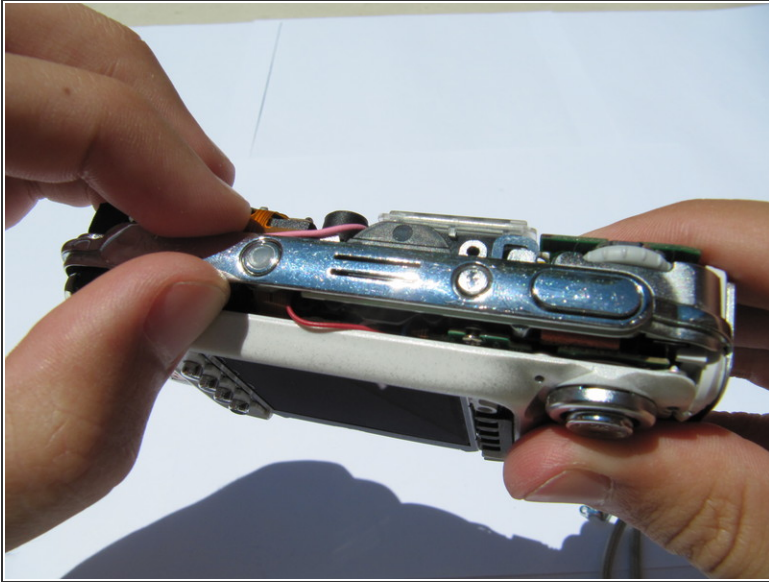


- Remove the top panel.

Step 8





- Remove the back panel screws (1x 3.33mm, and 1x 3.40mm).

Step 9

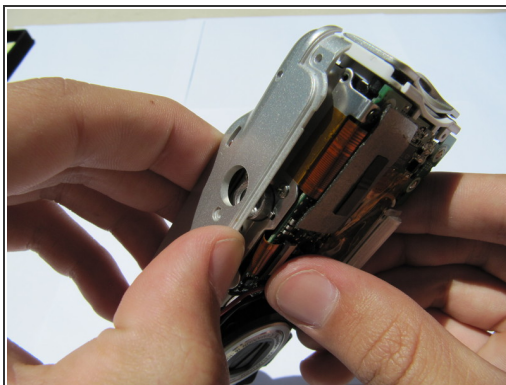



- Separate the inner casing from the tripod mount.

Step 10

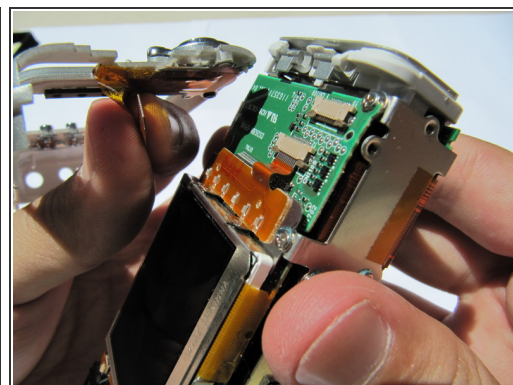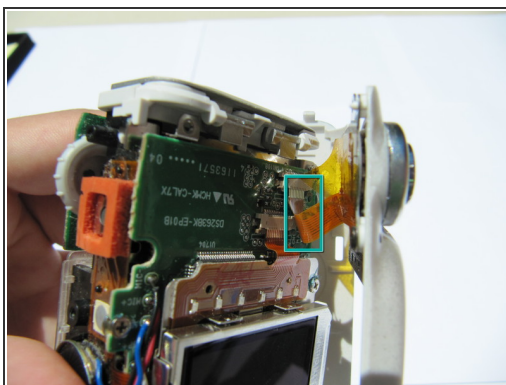


- Gently pull the orange tab out of the circuit board.

Step 11

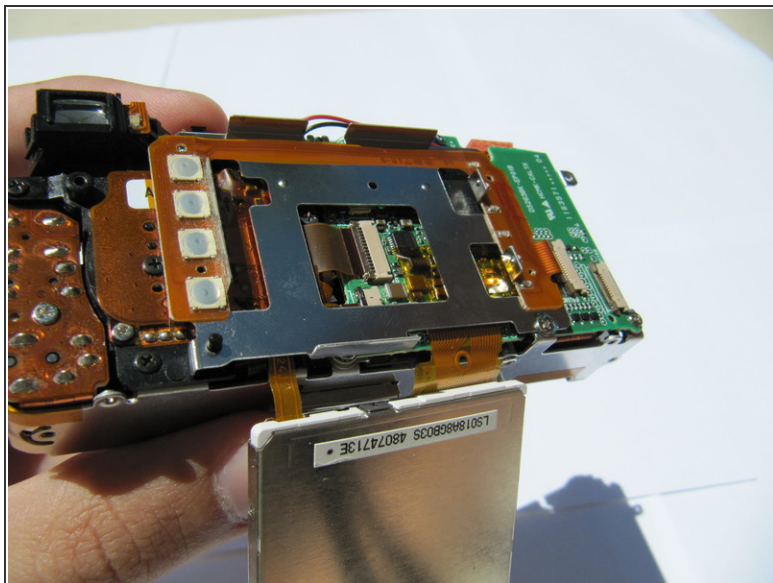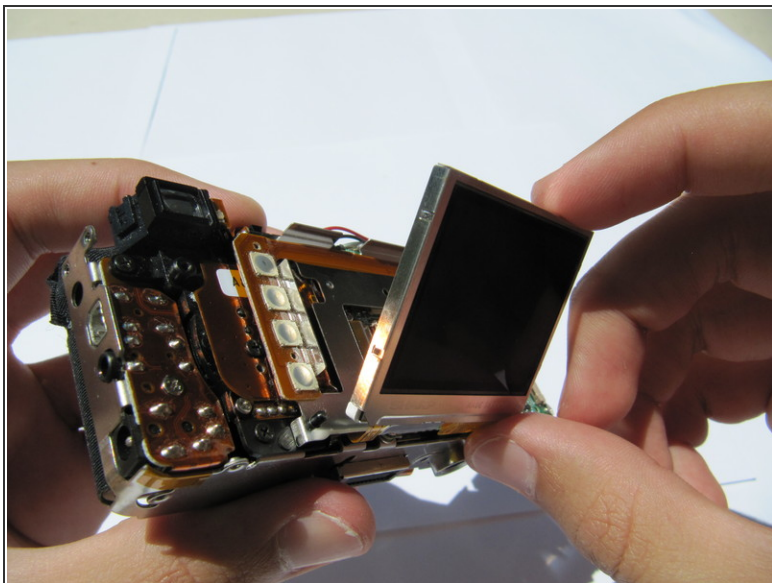



⚠ Carefully flip the LCD panel to expose the central circuit board.

Step 12

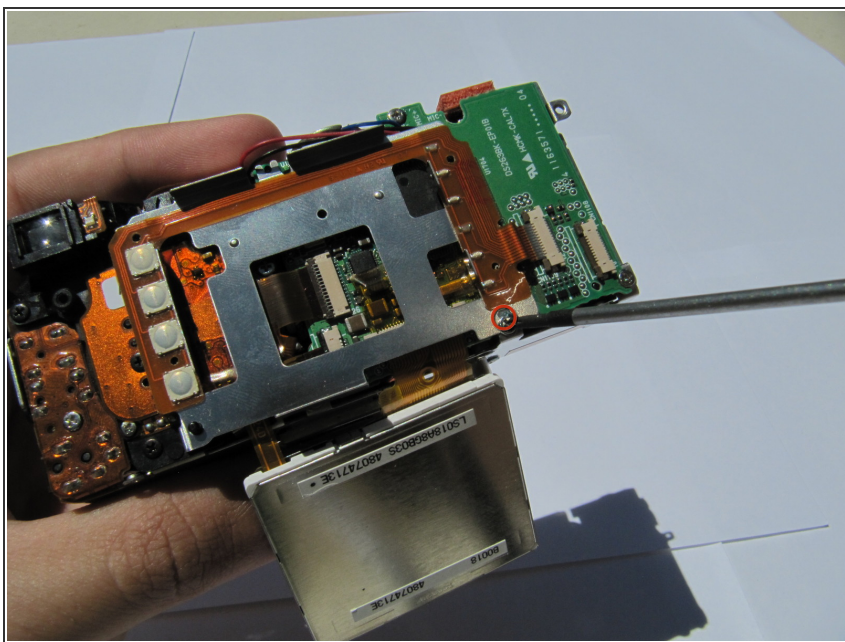




- Remove the (1x 3.33mm) screw from the menu button panel .

Step 13

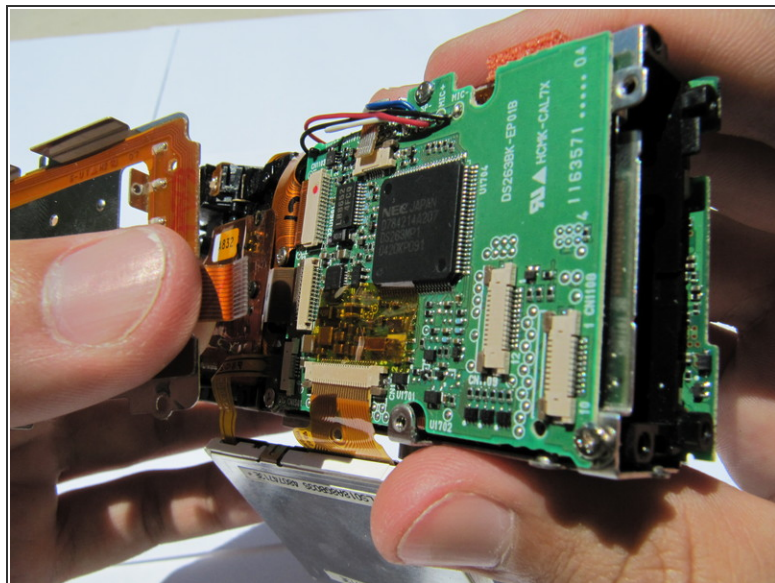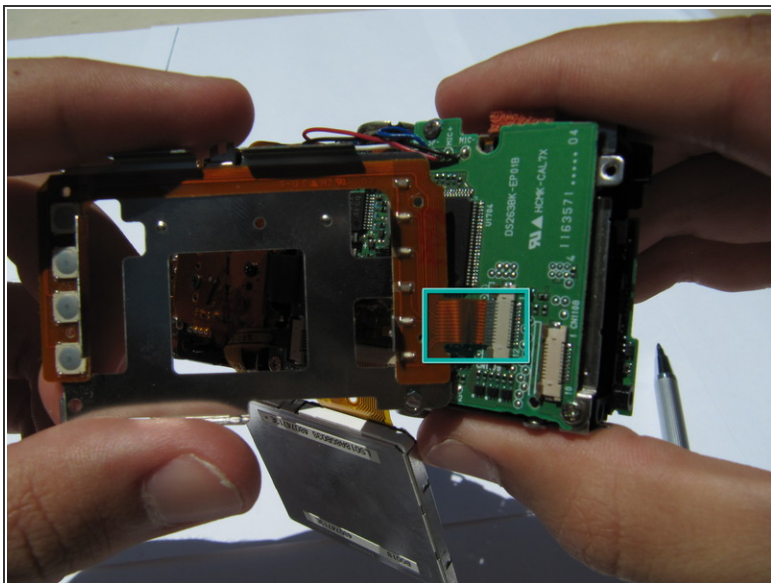


- Pull the second orange tab from the circuit board and remove the buttons.

Step 14 — Removing LCD

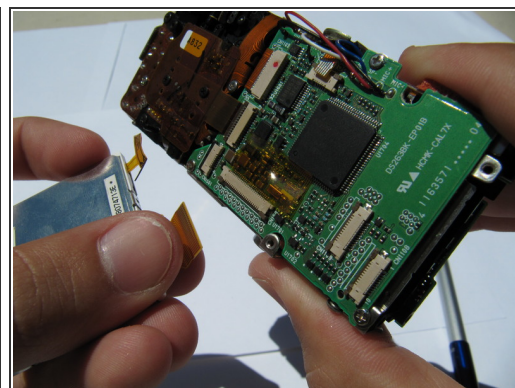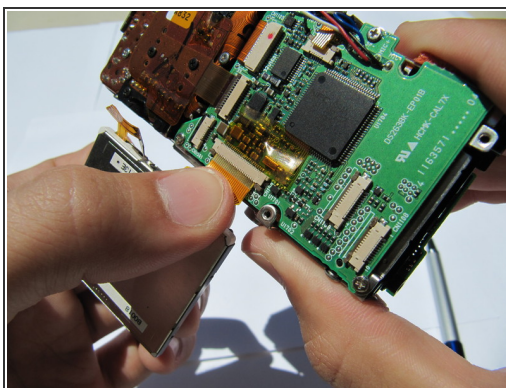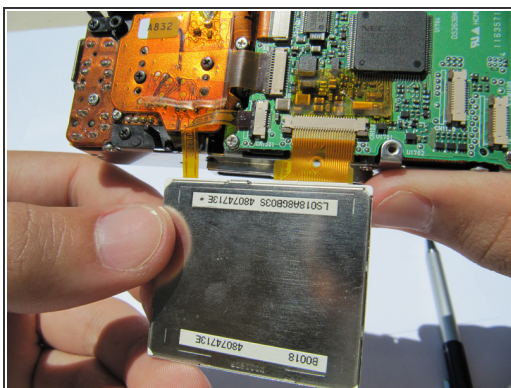


- Flip up the LCD screen to reveal the two orange ribbon cables.
- Disconnect the two ribbons cables from their sockets on the motherboard.

Step 15 — Microphone

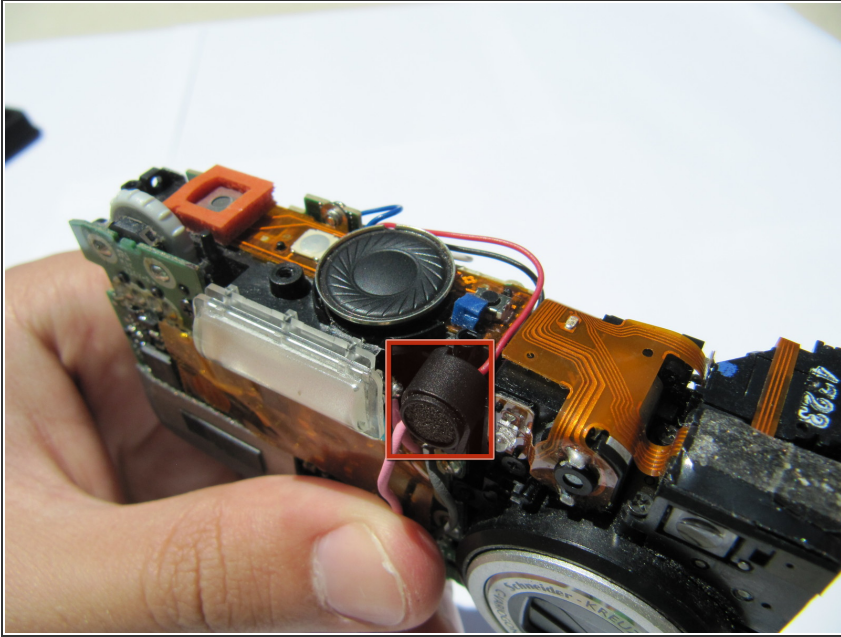


- Locate the microphone on top of the camera

Step 16

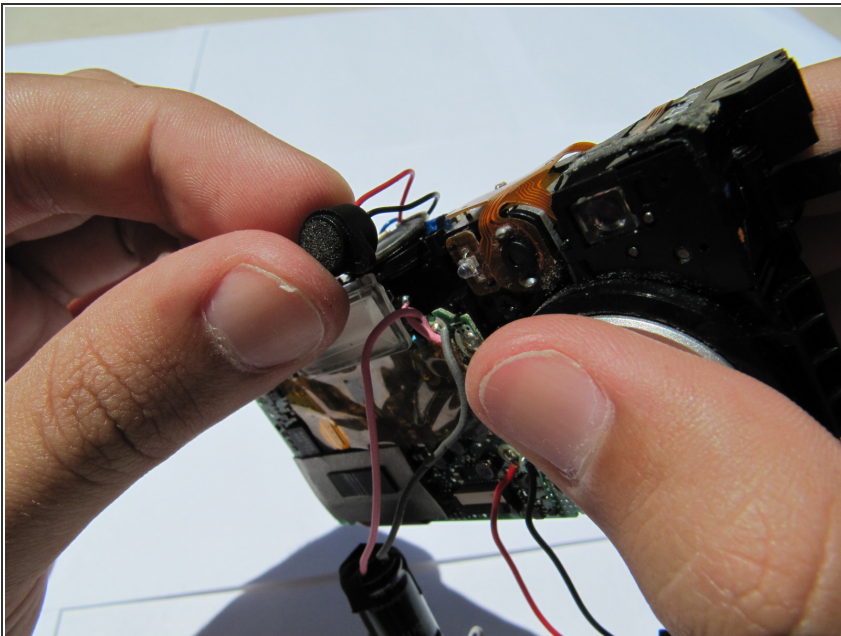

- ⚠ With a pry bar, remove microphone away from camera carefully.

Step 17

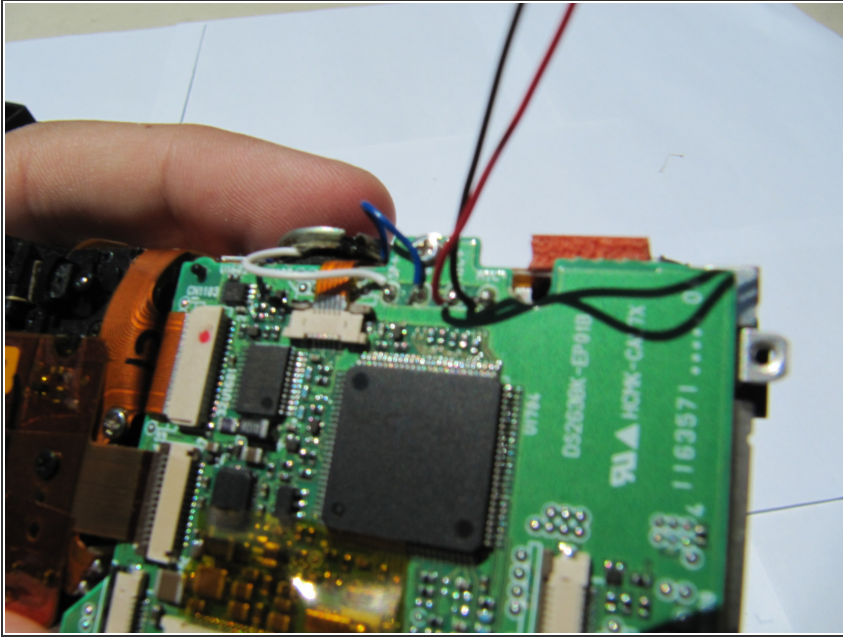

- Release it from it's pin and desolder

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 09:25:52 AM.